



mended that lubrication be performed every 6 months or 3,000 miles (5,000 km), whichever comes first, with **multipurpose Type NLGI No. 2**.

3. Rear Cushion Adjustment

The rear cushion ① has three-ranges of adjustment and can be adjusted to meet the different types of road or riding conditions. Position "I" is for normal riding with the damper spring strength increasing progressively from II to III; to be used for heavily load conditions or when operating on bad roads.

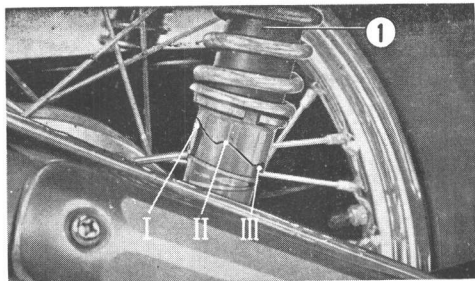

① Rear suspension

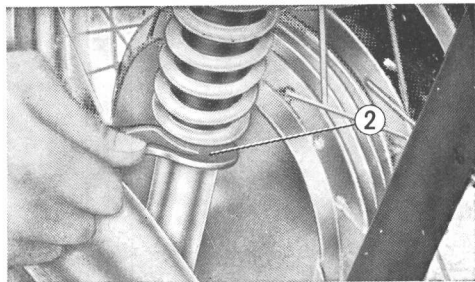

② 45 mm pin wrench