




## 3. SWITCHES AND HORN


### • COMBINATION SWITCH TEST

1

Switch position	Wire color			
	Red	Black	Brown/White	Brown
 <p>OFF</p>				
 <p>ON</p>	○ — ○		○ — ○	
 <p>P</p>	○ — ○			○ — ○




2

The switch is correct if there is continuity between the circuits "O—O" shown in the table.

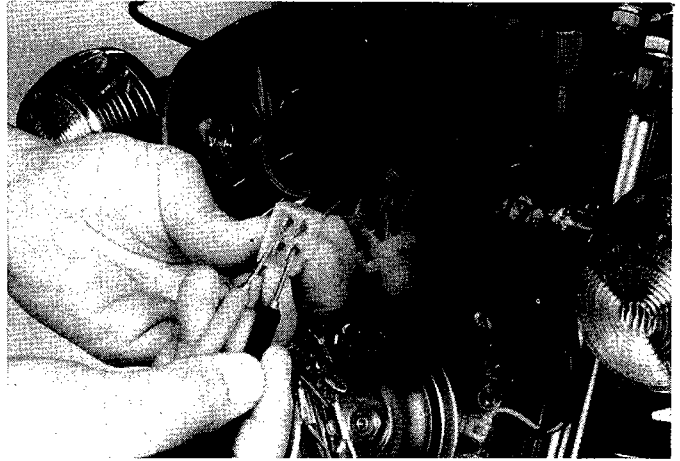

### • TURN SIGNAL SWITCH TEST

3

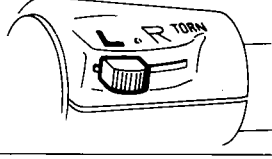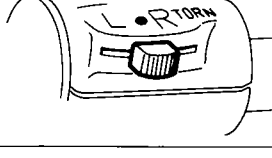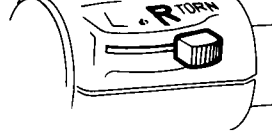Switch position	Wire color		
	Gray	Orange	Blue
 <p>L</p>	○ — ○		
 <p>N</p>			
 <p>R</p>	○ — ○		○ — ○

