


REAR SEAT COVER

See your authorized Honda dealer for removal/installation of the rear seat cover.

Installation:

1. Remove the seat (see page 40).
2. Slide the right and left grab rails (1) to the center by removing the mounting bolts (2) and fold it down as shown in the drawing (I).

(I)

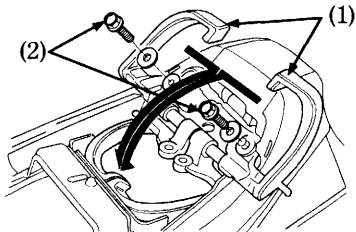

(1) Rear grab rails


(2) Mounting bolts

3. Install the seat securely, then install the rear seat cover (3) as shown in the drawing (II). Set the right and left mounting bolts and tighten them securely.

▲ WARNING

- * **The grab rails must be returned to the upright position when riding in tandem.**

(II)

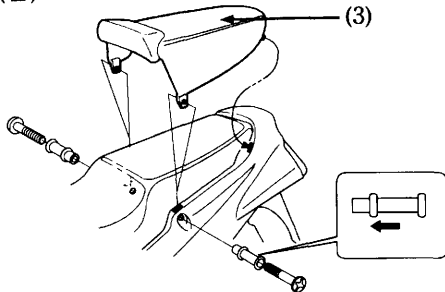

(3) Rear seat cover