


## FRONT COWL

### Removal:

1. Remove the clips A (1).
2. Remove the bolts A (2).
3. Remove the bolts B (3).
4. Remove the bolts C (4).

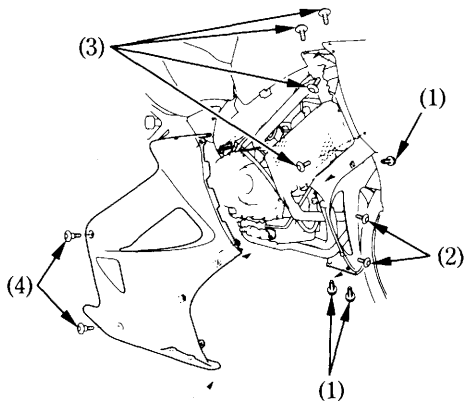


(1) Clips A

(2) Bolts A

### Installation:

- Installation can be done in the reverse order of removal.

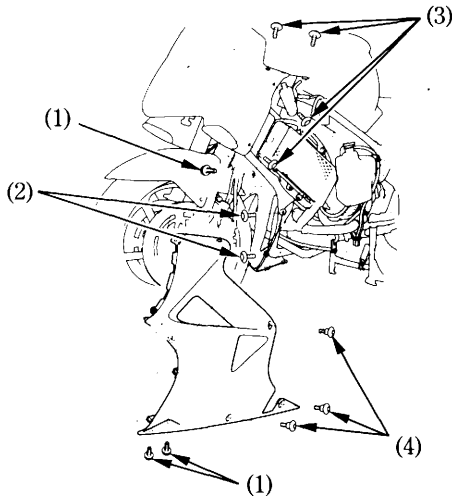

(3) Bolts B

(4) Bolts C