



To prevent scratches to the rear cowl, attach the seat cowl rubber (4) provided before installing the rear seat.

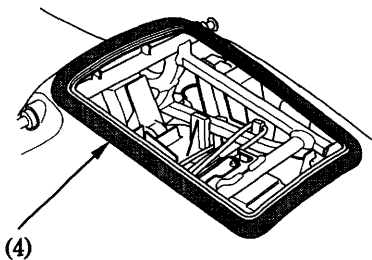

(4) Seat cowl rubber

Seat cowl panel

Remove the rear seat when using the seat cowl panel (1).

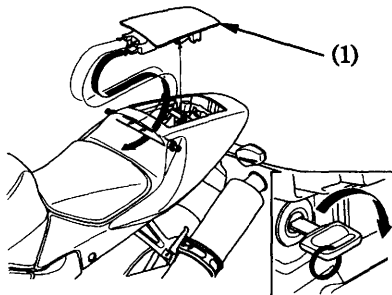

(1) Seat cowl panel