


6. Loosen the right step bracket bolt B and muffler band bolts and then, lift up the right step bracket upward.



7. Turn the muffler clockwise, and remove the rear wheel by removing the rear wheel nuts.

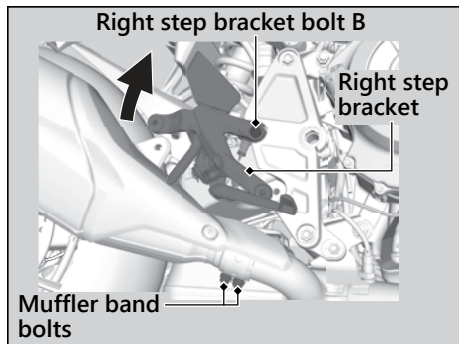