




Remove the master link retaining clip and master link.

Remove the drive chain.

Clean the drive chain in non-flammable or high flash point solvent with a brush and allow it to dry.

Inspect the drive chain for wear or damage. Replace any chain that is excessively worn or damaged.

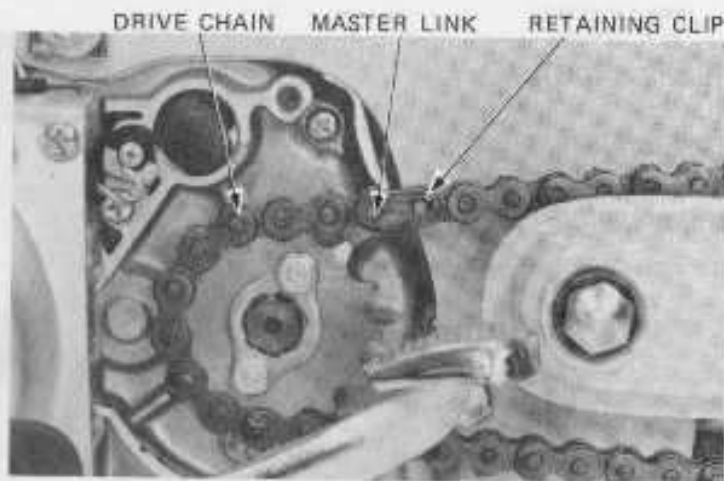


Inspect the drive and driven sprocket teeth for excessive wear or damage.

Replace if necessary.

NOTE

Never install a new drive chain on worn sprockets or a worn chain on new sprockets. Both chain and sprockets must be in good condition, or the replacement chain or sprockets will wear rapidly.

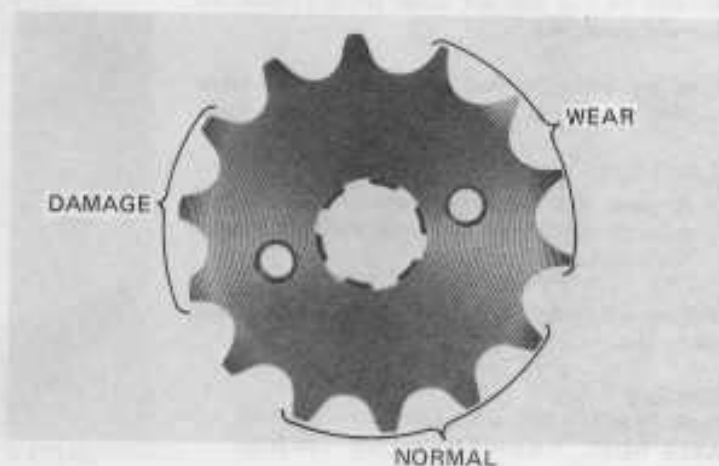

Lubricate the drive chain.

NOTE

Commercial aerosol type drive chain lubricant is recommended.

Install the drive chain.

NOTE

Note the direction of the master link retaining clip.

Install the upper and lower chain cases, drive sprocket cover and left side cover.

Adjust drive chain slack (page 3-11).

Check brake pedal free play and adjust, if necessary.

