



a. DISASSEMBLY/ASSEMBLY

• BRAKE CABLE

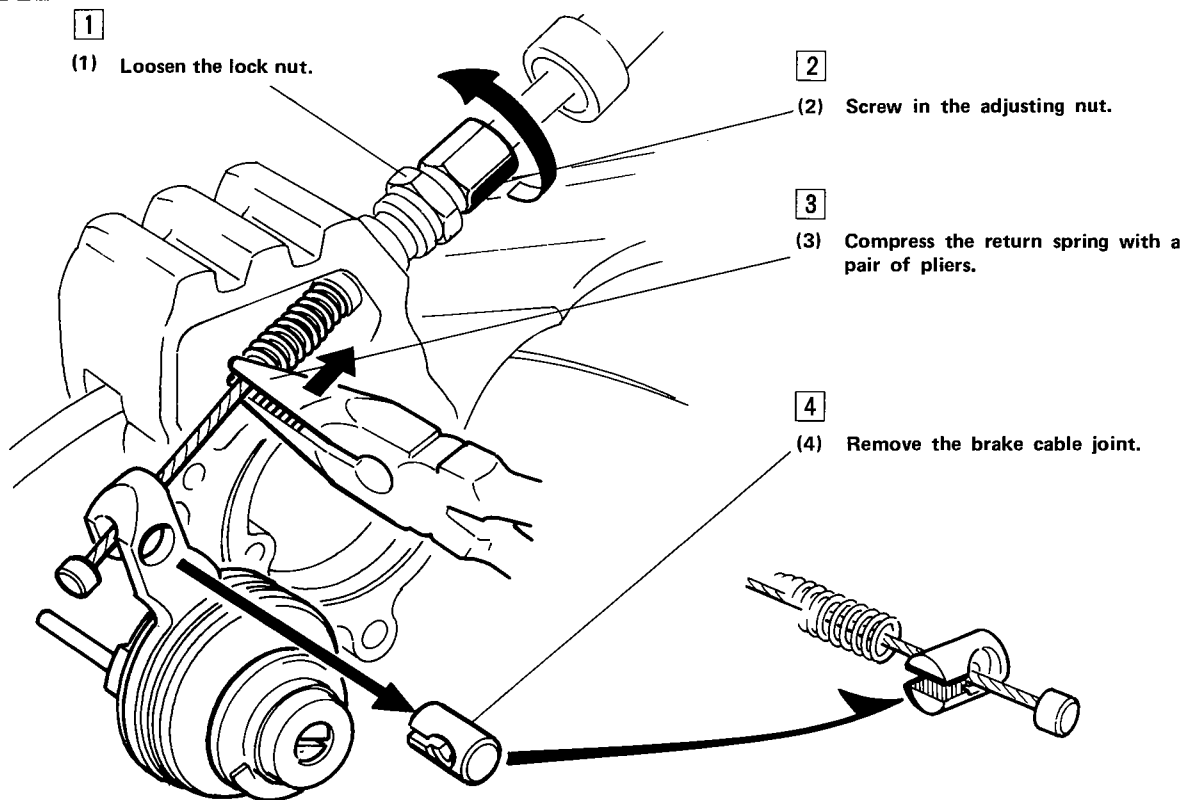

• BRAKE ARM ASSEMBLY

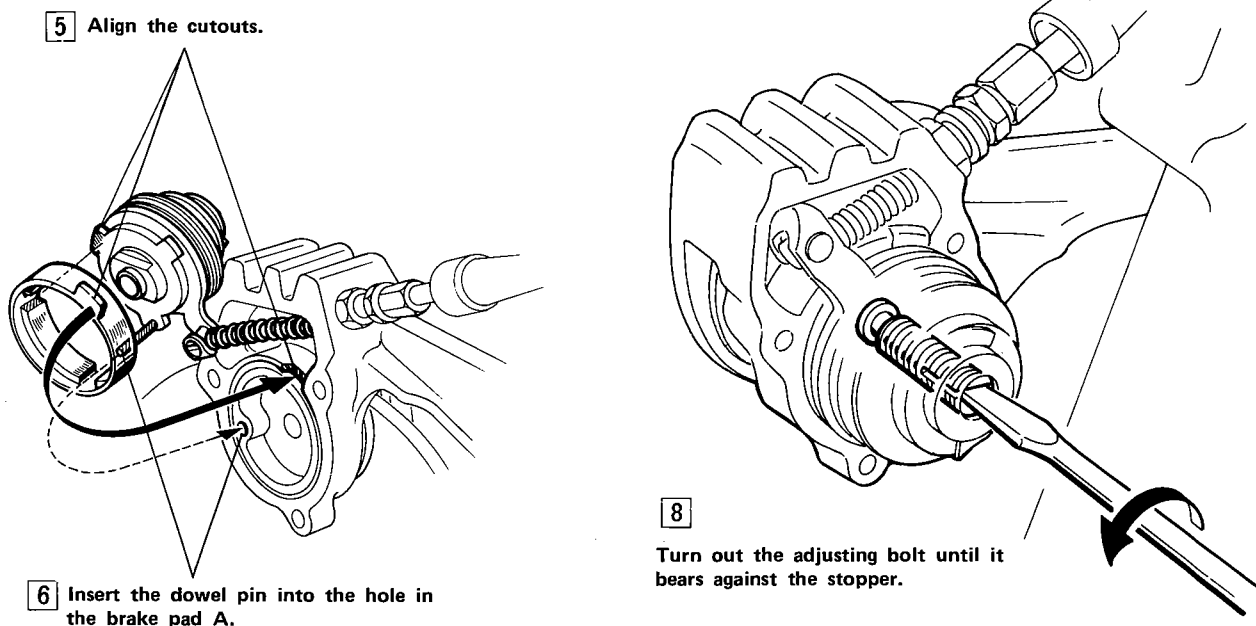

7 NOTE

Before assembly, apply silicon grease to the outer-periphery of the pad A and back of the pad B, respectively.