


REAR MASTER CYLINDER REMOVAL/INSTALLATION

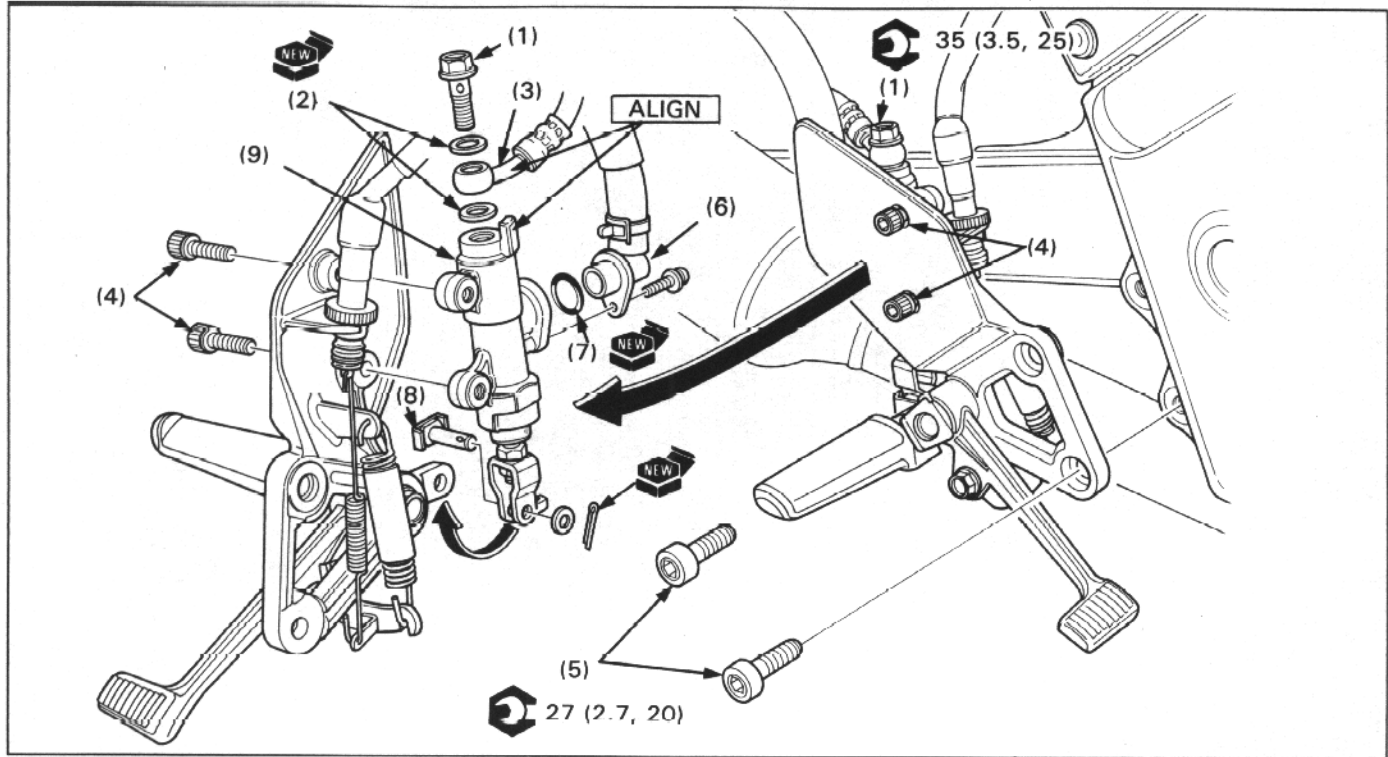

REQUISITE SERVICE

- Brake fluid replacement/air bleeding (section 17 of the Common Service Manual)

PROCEDURE	Q'ty	REMARKS
REMOVAL ORDER		• Installation is in the reverse order of removal.
(1) Brake hose bolt	1	
(2) Sealing washer	2	
(3) Brake hose	1	
(4) Master cylinder mounting bolt	2	Only loosen the bolts.
(5) Footpeg bracket bolt	2	
(6) Reservoir hose joint	1	
(7) O-ring	1	
(8) Push rod joint	1	Install it from the footpeg side with a new cotter pin.
(9) Master cylinder assembly	1	Remove the mounting bolts (4) and master cylinder.