



Install the drive sprocket cover.

**NOTE:**

Align the hexagonal portion of the speedometer gearbox with the drive sprocket bolt head.

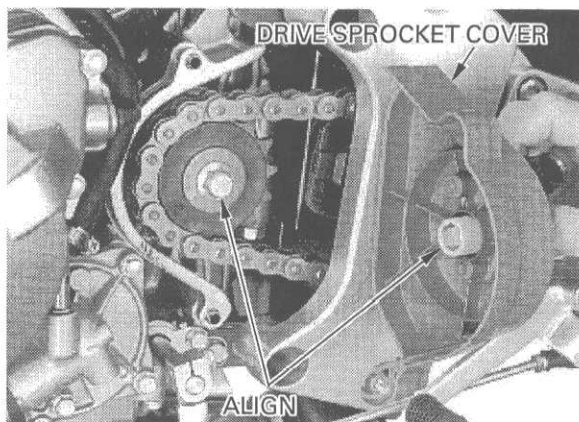

Tighten the drive sprocket cover bolts.

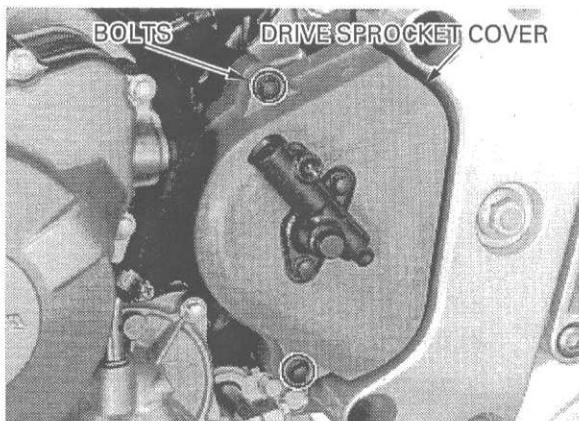

Install the speedometer cable and tighten the screw securely.

Install the following:

- PAIR control valve (page 5-27)
- Exhaust pipe (page 2-5)
- Carburetor (page 5-24)
- Fuel tank (page 5-4)
- Side cover (page 2-2)

Pour recommended engine oil up to the proper level (page 3-12).

Fill the cooling system with recommended coolant and bleed the air (page 6-5).

