



Remove the cam chain tensioner slider.

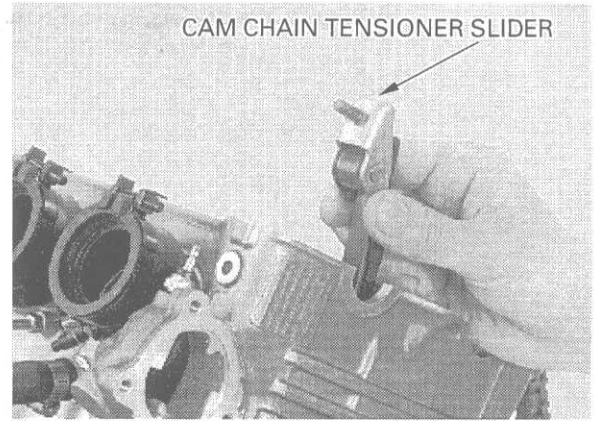


Remove the following:

- Bypass tube
- Thermo sensor connector (page 19-10)
- PAIR control valve tubes (page 5-27)

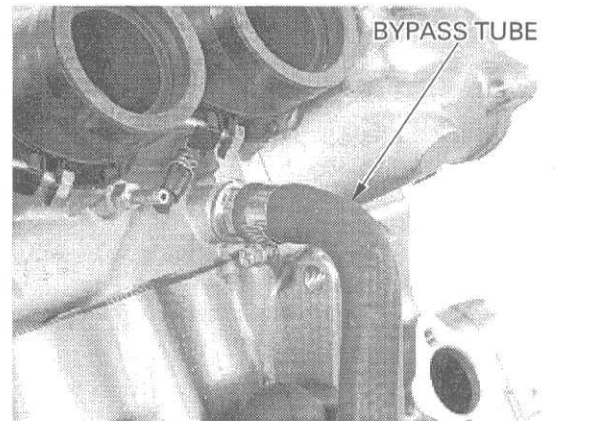

Remove the cylinder head 6 mm bolts.

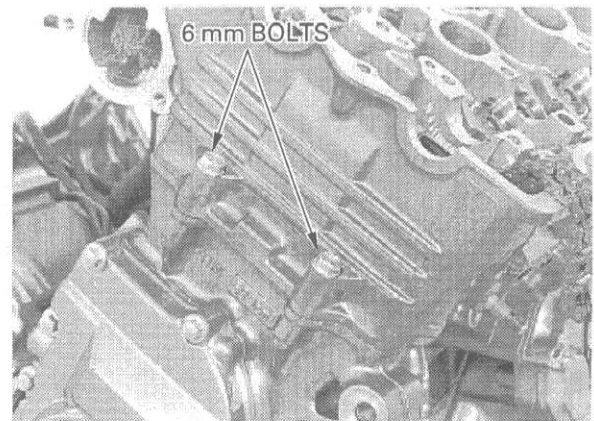

Remove the ten 9 mm special bolts.

NOTE:

Loosen the 9 mm special bolts in a crisscross pattern in 2-3 steps.

Remove the cylinder head.

