


Assemble the anti-dive case in the reverse order of disassembly.

NOTE

- Replace the O-rings with new ones.
- Apply locking agent to the threads of the screws and socket bolts before assembly.

Apply ATF to the piston and piston O-ring.
Apply silicone grease to the pivot bolt collar.
Check the operation of the piston.

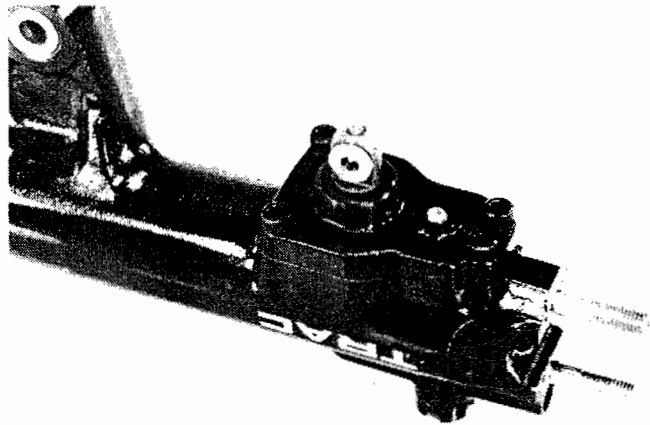

ASSEMBLY

Before assembly, wash all parts with a high flash point or non-flammable solvent and wipe them off completely.

