




REAR FENDER

REMOVAL

Remove the seat.
Remove the four socket bolts attaching the handrail and rear cowl.

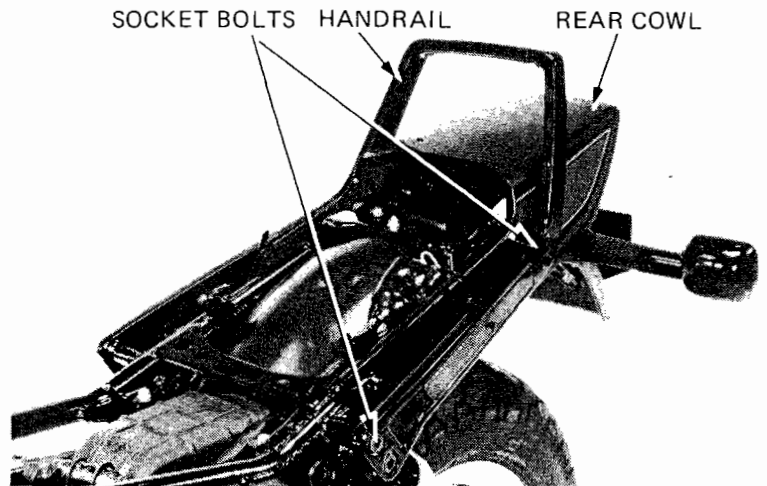


Remove the nut mounting rear fender A and fender B.
Disconnect the taillight coupler, rear turn signal and license light wire connectors.
Remove the two rear fender B mounting bolts and rear fender B.

INSTALLATION

Install rear fenders A and B in the reverse order of removal.

NOTE

Be careful not to pinch the wires between the parts.

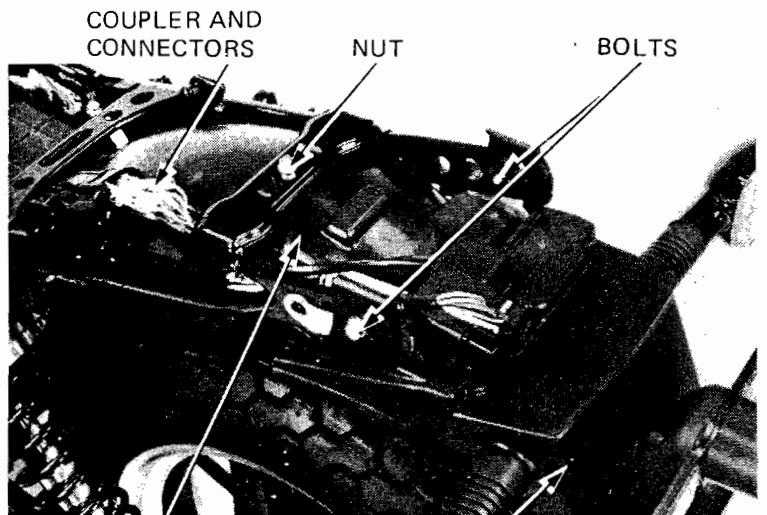

REAR FENDER A

REAR FENDER B

