




Remove the two license plate bracket mounting bolts and the bracket.

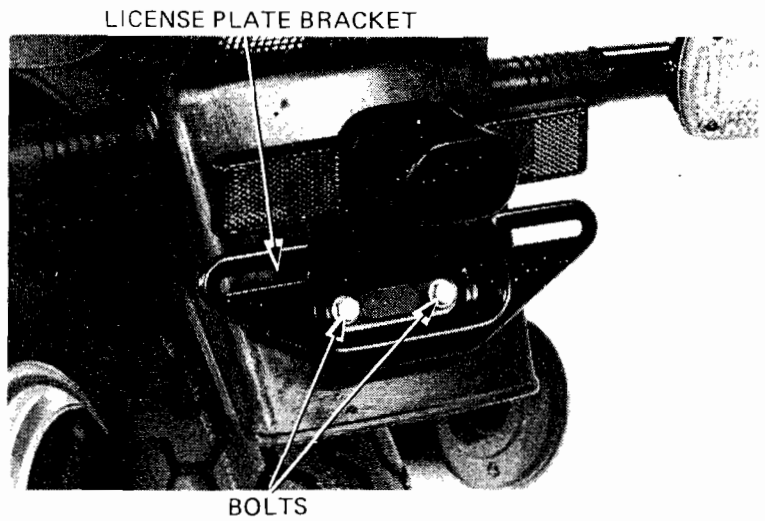

Remove the two license light mounting nuts and the light assembly.

Install in the reverse order.

