

Fig. 3 ①

### Assembly

1. Install the muffler before attaching the two exhaust pipes.
2. Put the sealing gasket on the exhaust pipe, and then assemble the pipe to the muffler.
3. Fasten the exhaust pipe to the cylinder with the joint and joint collar in between.
4. Install the muffler band so that the band clamping bolt is exactly down on the muffler.

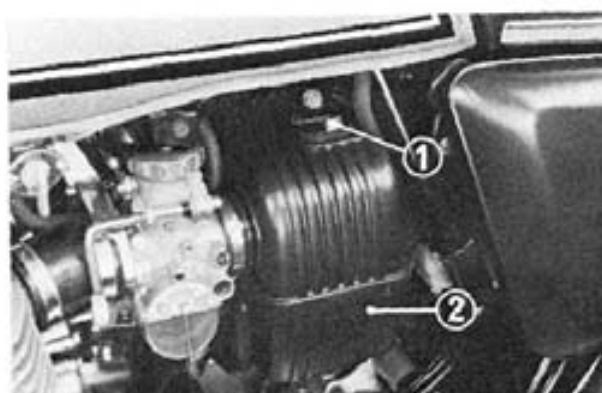


Fig. 4 ① Air cleaning mounting bolt  
② Air cleaner lower case

### Air Cleaner Maintenance

1. Remove the two air cleaner mounting bolts ① and remove the air cleaner lower case ②.

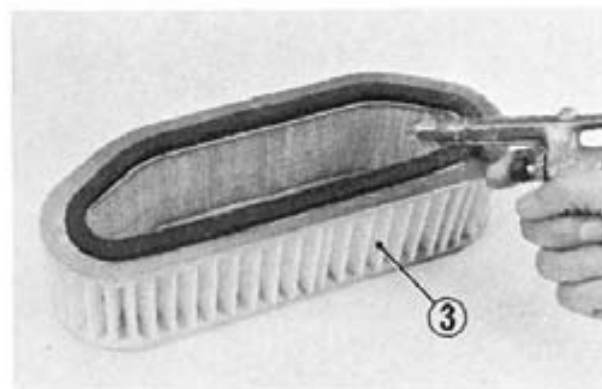


Fig. 5 ③ Air cleaner element

2. Clean the air cleaner element by tapping it lightly to loosen dust.  
The remaining dust can be brushed from the outer element surface or blown away by applying compressed air from the inside of the element.