

### C. Brake pad inspection

Remove the wear indicator cap and check the brake pads for wear. If the pad is worn to the red line, replace all front pads as a set.

## 2. FRONT BRAKE SWITCH

The front brake switch has been modified from the hydraulic switch to the mechanical switch.

## 3. REAR BRAKE

### A. Pedal free height adjustment

To adjust the brake pedal free height, remove the rubber cap by inserting a screw driver in the groove, loosen the lock nut and turn the adjuster as necessary. Turning the adjuster clockwise will decrease the pedal height, and turning it counterclockwise will result in an increase. After adjustment, tighten the lock nut securely and install the rubber cap.

### B. Rear brake hose

The brake hose is installed so that the bent side of the hose ends is at the caliper as shown in Fig. F2-10.

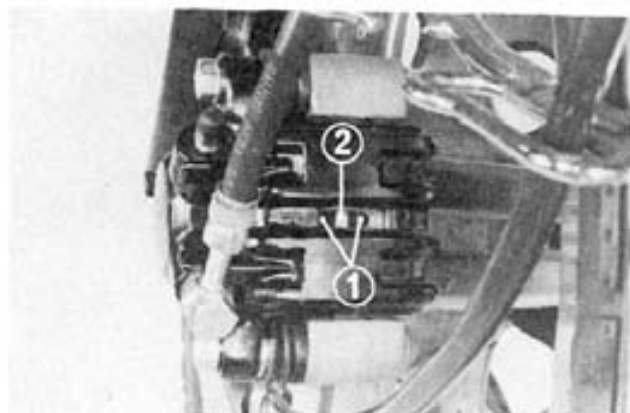


Fig. F2-7 ① Red line ② Brake disc



Fig. F2-8 ① front brake switch

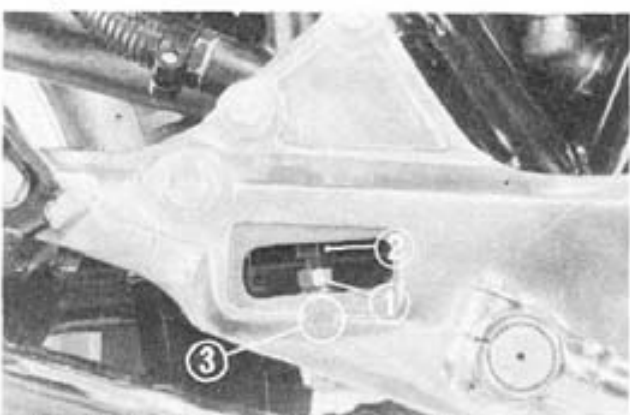


Fig. F2-9 ① Lock nut ② Adjuster ③ Groove

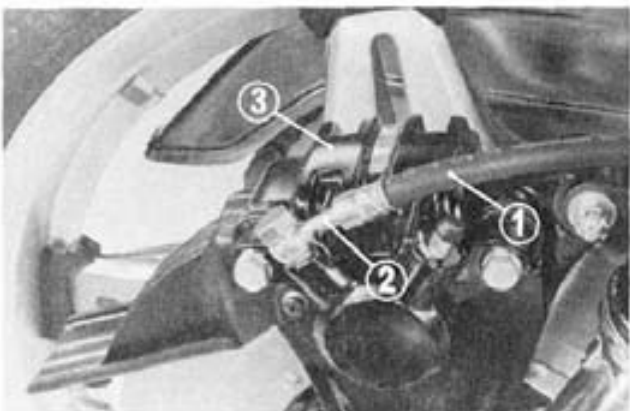


Fig. F2-10 ① Brake hose ② Bent side ③ Caliper