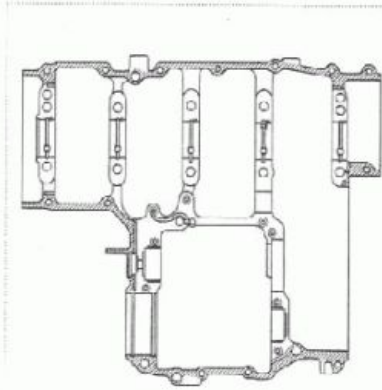
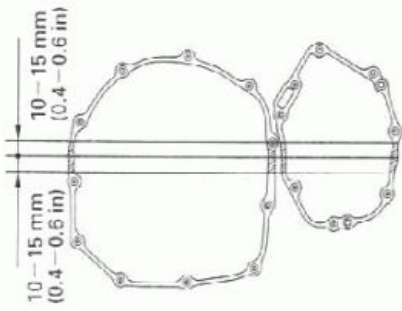






LUBRICATION & SEAL POINTS

ENGINE

LOCATION	MATERIAL	REMARKS
<p>Crankcase mating surface</p>   	<p>Liquid sealant (Three Bond 1207B or equivalent)</p>	
<p>Oil pan mating surface</p> 		
<p>Ignition pulse generator cover bolt threads (marked "△")</p> 		<p>Coating width: 6.5 ± 1 mm</p>
<p>Oil pressure switch threads</p> <p>Do not apply sealant to the thread head 3-4 mm (0.1-0.2 in).</p> 		
<p>Thermo unit threads</p>		