


Reverse Tank Removal/Installation

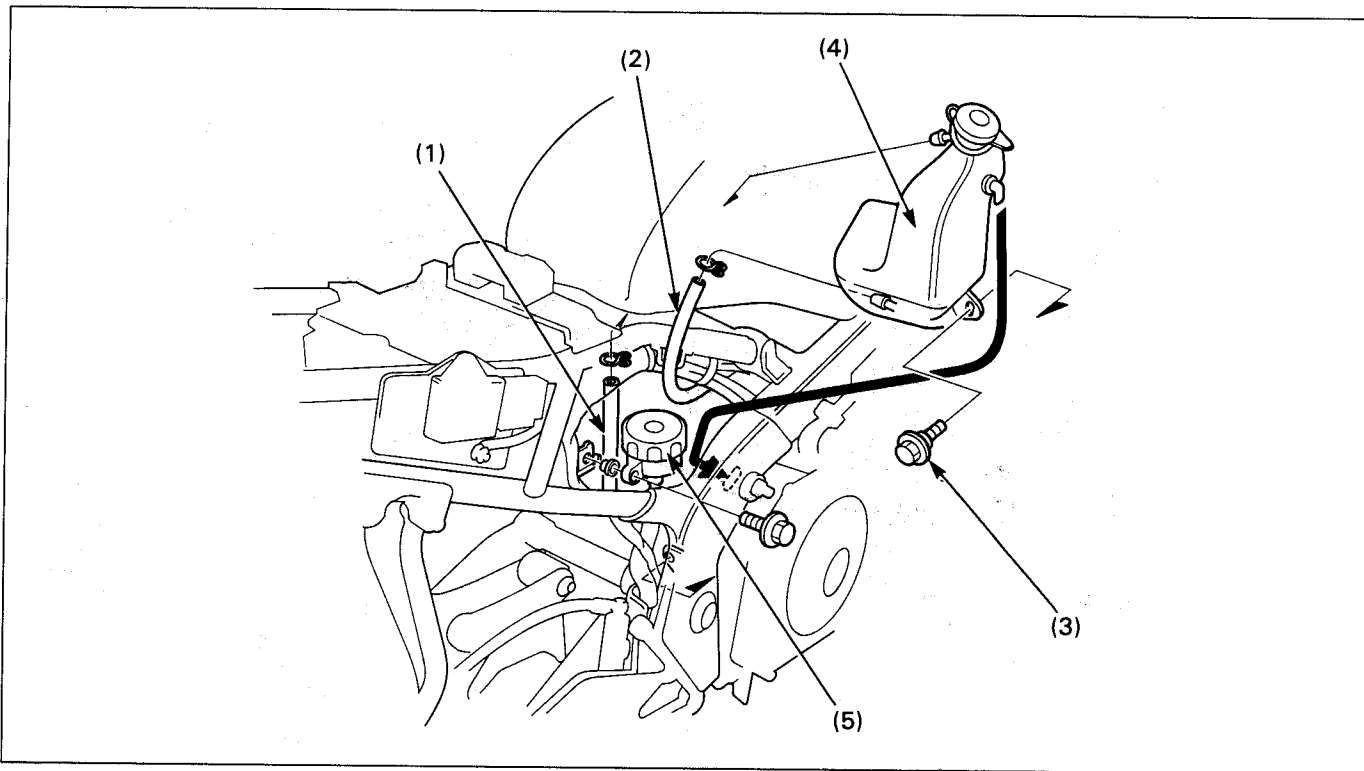

Requisite Service

- Coolant draining (page 5-3)
- Shock absorber removal/installation (page 13-4)
- Right side cover removal/installation (page 2-2)
- Coolant refill (section 5 of the Common Service Manual)

Procedure	Q'ty	Remarks
Removal Order		Installation is in the reverse order of removal.
(1) Siphon tube	1	
(2) Reverse tank breather tube	1	
(3) Reverse tank mounting bolt	1	
(4) Rear master cylinder reservoir	1	
(5) Reverse tank	1	
		NOTE
		• Release the hook on the reverse tank from the oval hole in the frame by swing the tank rearward.