


Suspension Linkage Removal/Installation

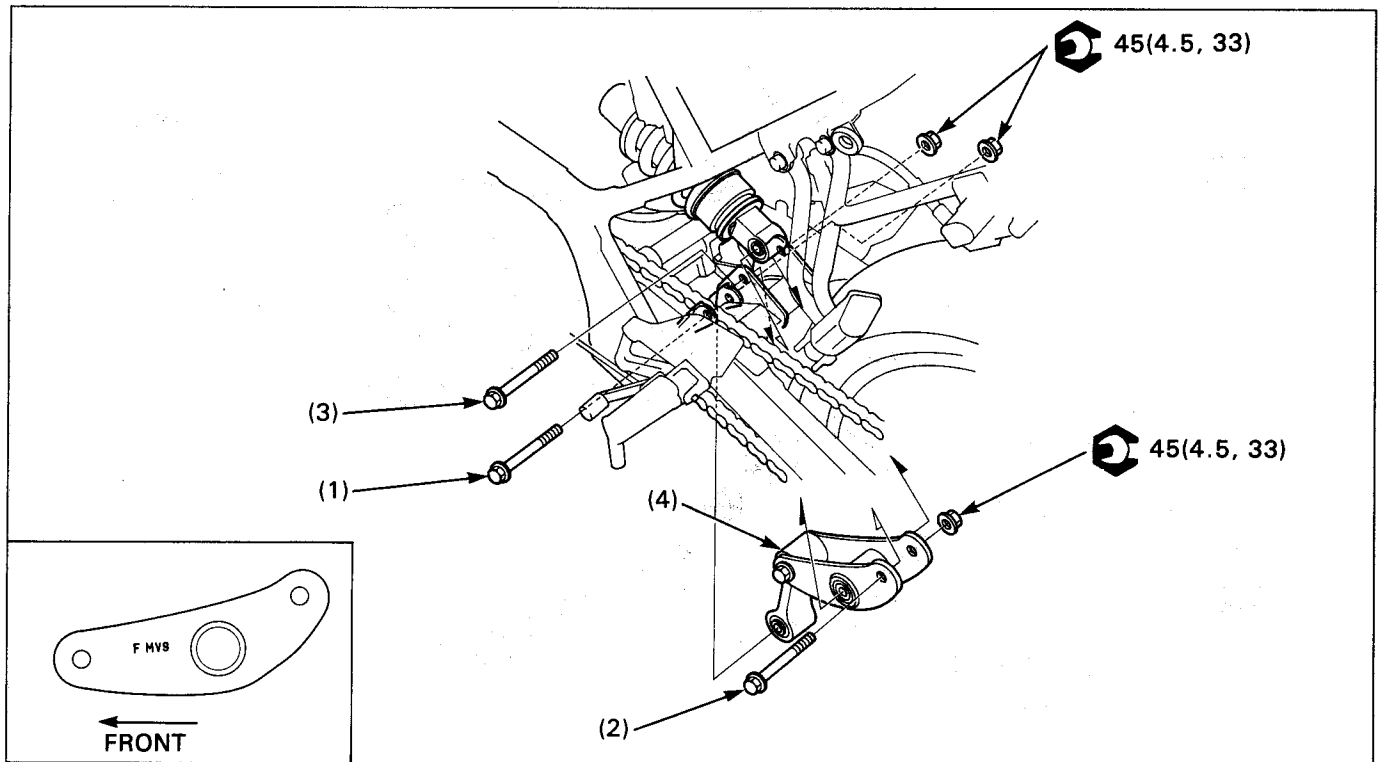

NOTE

- Put the motorcycle on its center stand.

Requisite Service

- Rear fender B removal/installation (page 2-7)

Procedure	Q'ty	Remarks
Removal Order		Installation is in the reverse order of removal.
(1) Shock link bolt (shock arm side)	1	
(2) Shock absorber mounting bolt (lower)	1	
(3) Shock link bolt (frame side)	1	
(4) Shock link/Shock arm	1	Install the shock link and shock arm with the mark "←F MV9" facing left side.