



Remove bearings, collar, dust seals from driven flange

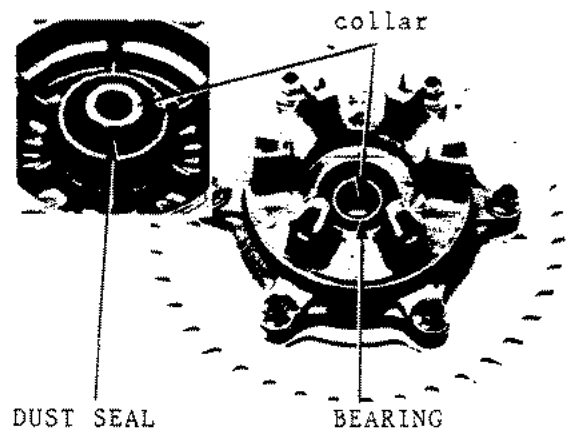

ASSEMBLY

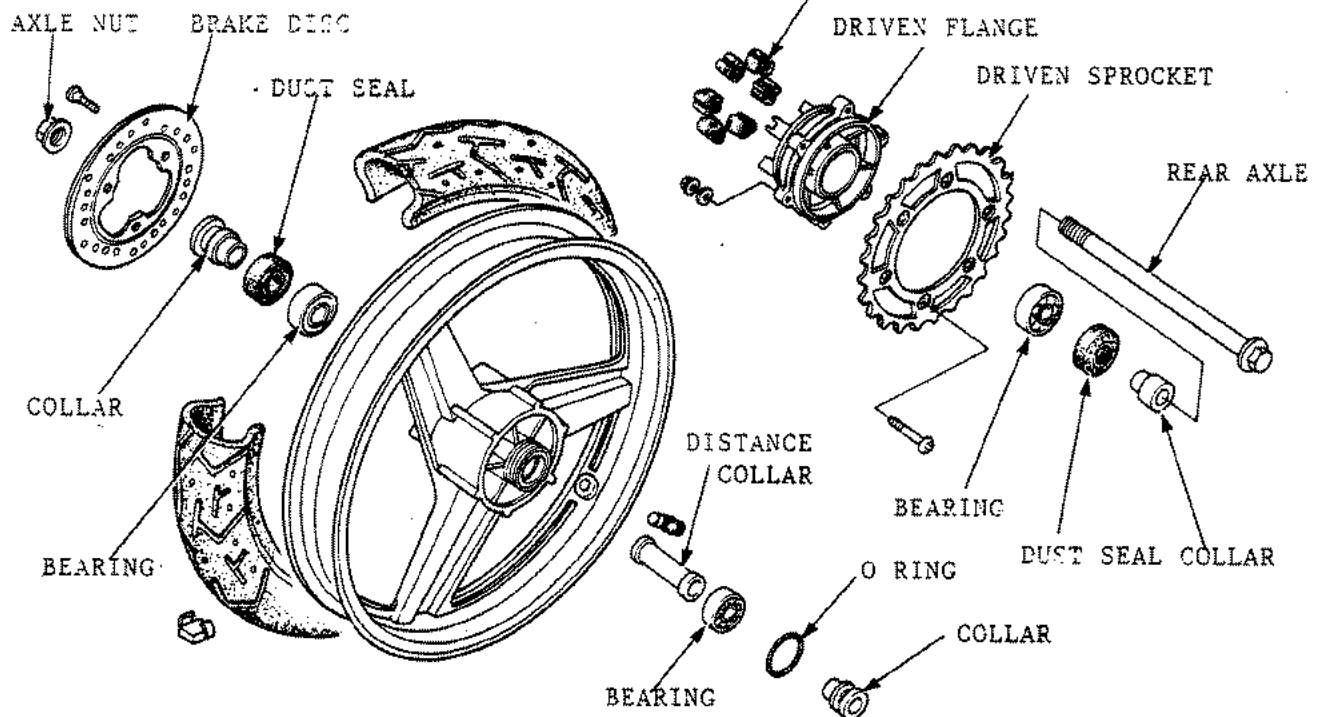

Inset new bearings into driven flange

* Insert bearings so that there is more sticking out in driven flange

Standard tools

Driver handle A

Outer driver (42x47mm)

Pilot (20mm)

07740-0010000

07746-0010300

07746-0040500

