


Throttle Housing Removal/Installation

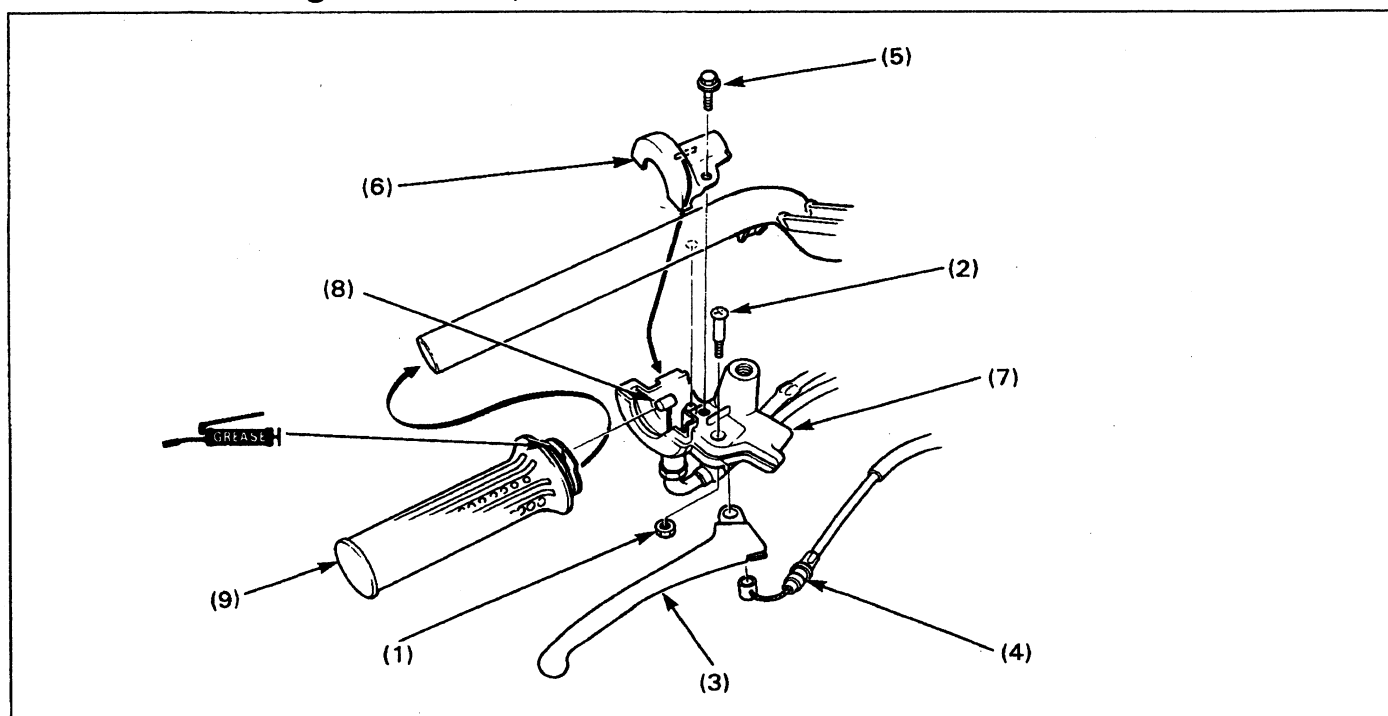

Requisite Service

- Handle cover removal/installation (page 2-7)

Procedure		Q'ty	Remarks
	Removal Order		Installation is in the reverse order of removal.
(1)	Nut	1	
(2)	Front brake lever pivot screw	1	
(3)	Front brake lever	1	
(4)	Front brake cable	1	
	Throttle housing		When installing, hook the slot in the upper housing to the tab of the lower housing. When installing, align the boss on the housing with the hole in the handlebar.
(5)	Bolt	1	
(6)	Upper throttle housing	1	
(7)	Lower throttle housing	1	
(8)	Throttle cable	1	
(9)	Throttle grip	1	