


Disassemble the rear fairing as shown.

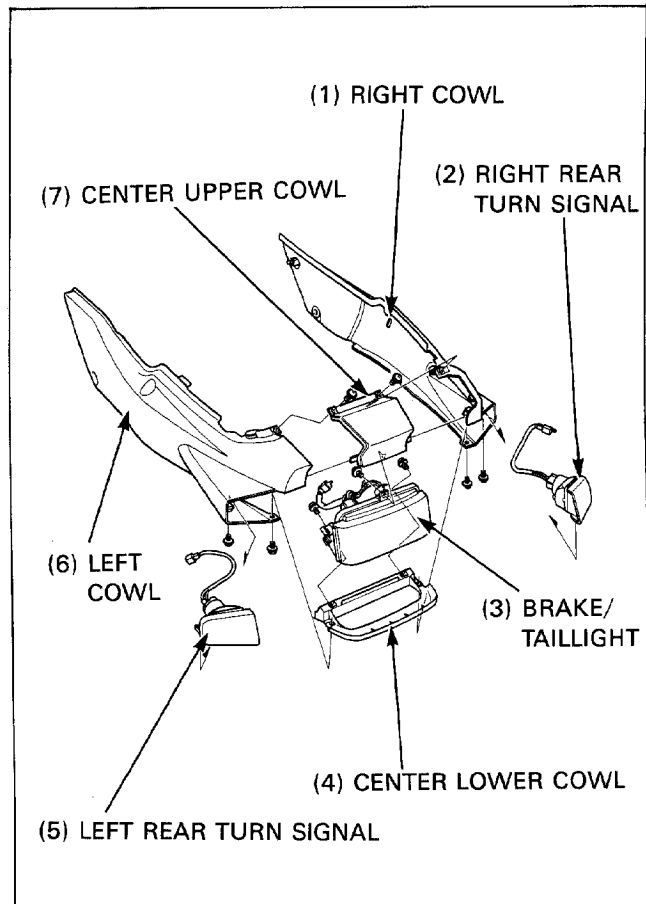

Middle Fairing

'90-'93:

Removal

Turn the quick screws 90 degrees counterclockwise.

Remove the front lower screw.

CAUTION

- Before removing the middle fairing, remove the front lower screw securely. If the front lower screw stays in the middle fairing, middle fairing will damage.

'90-'93:

