


After '93:

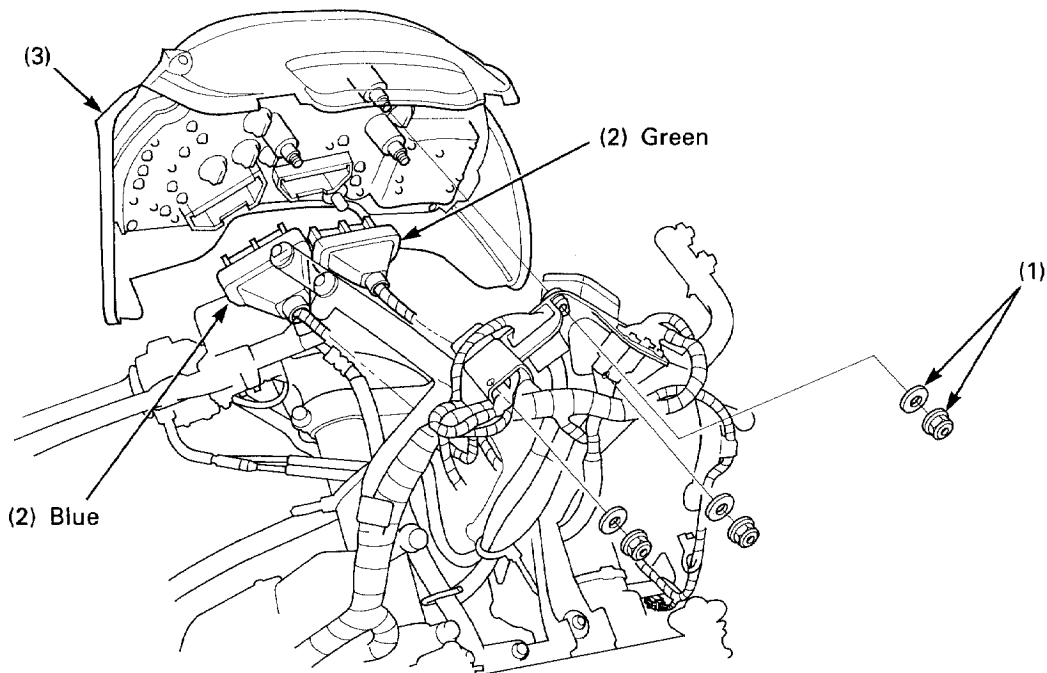

Requisite Service

- Upper fairing removal/installation (page 2-12)

Procedure		Q'ty	Remarks
	Removal Order		Installation is in the reverse order of removal.
(1)	Nut/cone spring washer	3/3	CAUTION: • Be careful not to damage the printed circuit board on the bottom of the meter assembly.
(2)	Meter connector	2	
(3)	Meter assembly	1	