

BATTERY

Remove the left side cover and inspect the battery fluid level. When the fluid level nears the lower level, remove the battery and add distilled water to the upper level line as follows:

Remove the regulator/rectifier holder bolt and open the holder.

Disconnect the negative cable at the battery terminal. Then remove the positive cable.

Pull out the battery and add distilled water to the upper level line.


Reinstall the battery.

NOTE:

Add only distilled water. Tap water will shorten the service life of the battery.

WARNING


The battery electrolyte contains sulphuric acid. Protect your eyes, skin, and clothing. If electrolyte gets in your eyes; flush them thoroughly with water and get prompt medical attention.

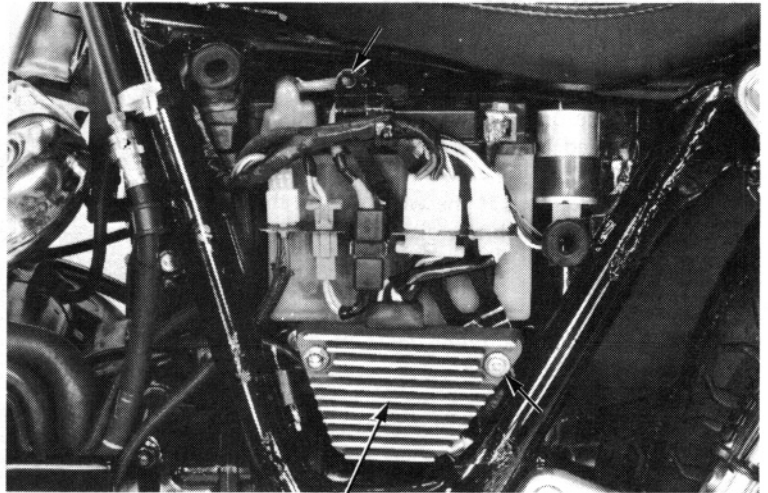

REGULATOR/RECTIFIER
HOLDER

POSITIVE TERMINAL

NEGATIVE TERMINAL

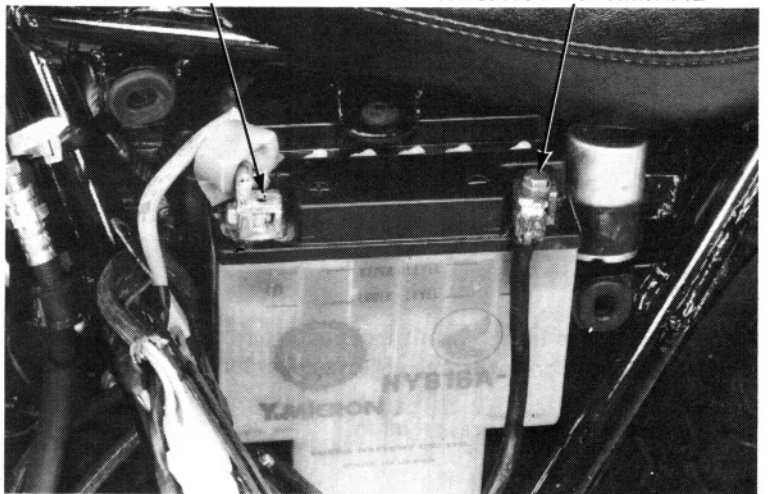

BRAKE FLUID


Check the front brake fluid reservoir level. If the level nears the lower level mark remove the cover and diaphragm. Fill the reservoir with DOT-3 Brake Fluid to the upper level mark located inside the reservoir.

Check the entire system for leaks, if the level is low.

CAUTION:

- Do not remove the cover until the handlebar has been turned so that the reservoir is level.
- Avoid operating the brake lever with the cap removed. Brake fluid will squirt out if the lever is pulled.
- Do not mix different types of fluid, as they are not compatible with each other.

Refer to section 17 for brake bleeding procedures.

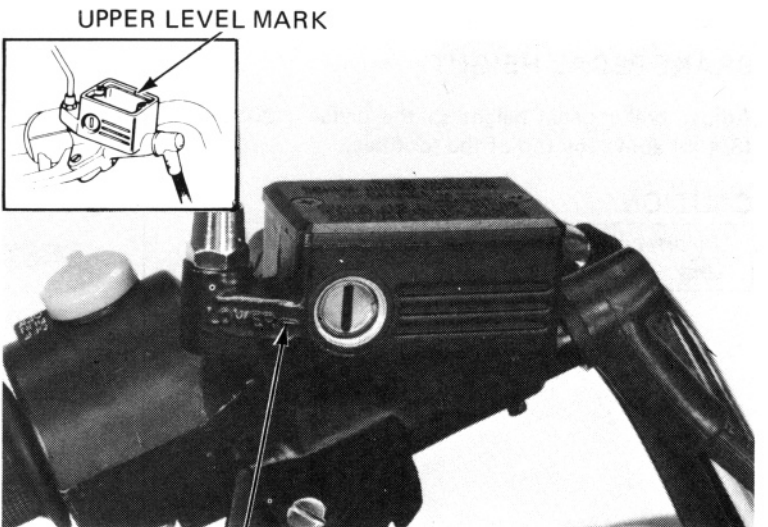

UPPER LEVEL MARK

LOWER LEVEL MARK