


● **Construction**

A rocker arm is installed on an eccentric rocker arm shaft. An assist shaft and spring fit in a notch on top of the shaft. The hydraulic tappet fits in a notch in the bottom of the shaft. Together, they make the eccentric rocker arm shaft revolve to help maintain zero valve clearance.



The tappets are continuously supplied with air-bleed oil from the de-foaming chamber in the cylinder head cover where oil pass through.

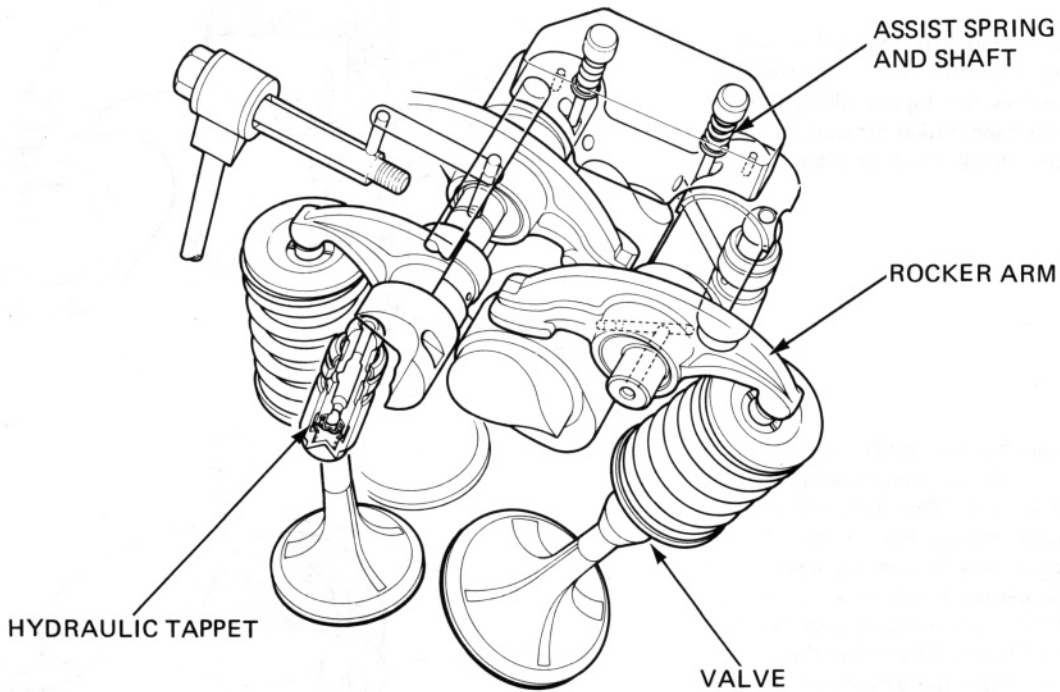