



MAINTENANCE

Clean the drive chain with a non-flammable or high flash point solvent that will not damage the O-rings and wipedry.


CAUTION:

Do not use a steam cleaner, high pressure washers or solvents as these will damage the O-rings.

Lubricate the drive chain with SAE 80 or 90 gear oil.

CAUTION:

Do not use commercial aerosol chain lubricants. They contain solvents which could damage the O-rings.

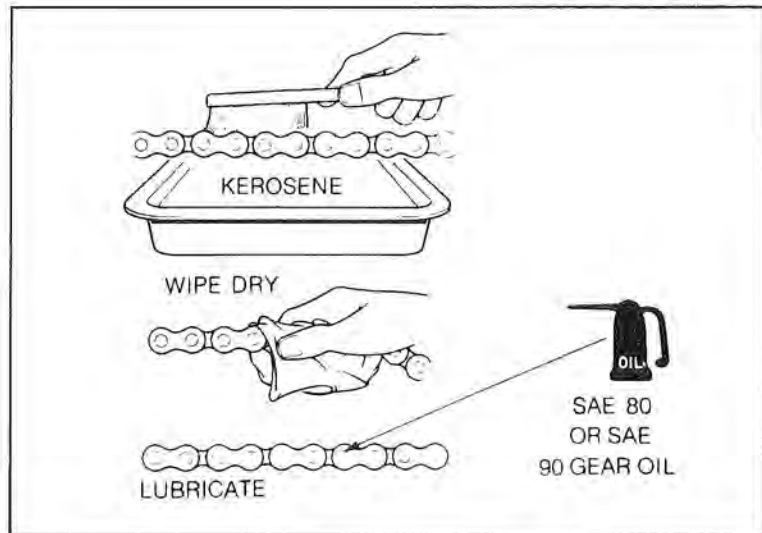


Inspect the drive chain and O-rings for possible wear or damage. Replace the chain, if it is worn excessively or damaged.

Measure the drive chain length with the chain held so that all links are straight.

105 PINS LENGTH:

STANDARD: 1,635 mm (64-1/8 in)

SERVICE LIMIT: 1,651 mm (64-3/4 in)

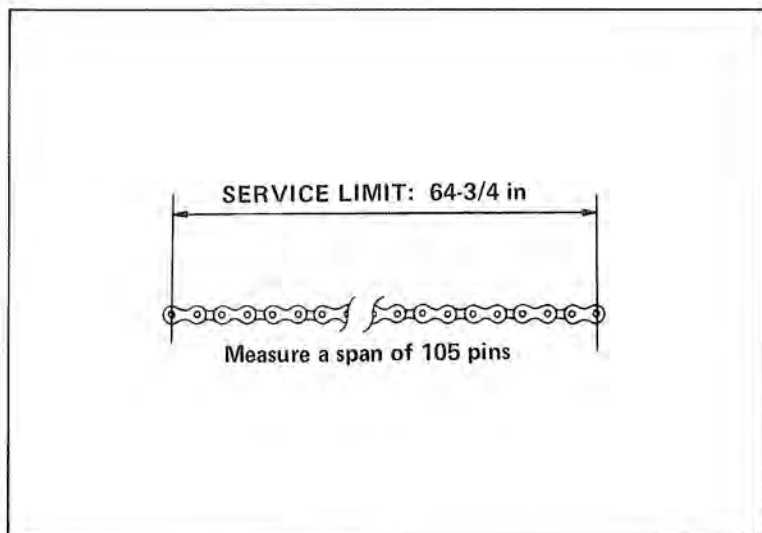

Inspect the sprocket teeth for excessive wear or damage. Replace if necessary.

NOTE

Never install a new drive chain on worn sprockets or a worn chain on new sprockets. Both chain and sprockets must be in good condition, or the new replacement chain or sprockets will wear rapidly.

