





Install the front brake lever bracket, aligning the handlebar punch mark with the brake lever bracket split.
Tighten the pinch screw.

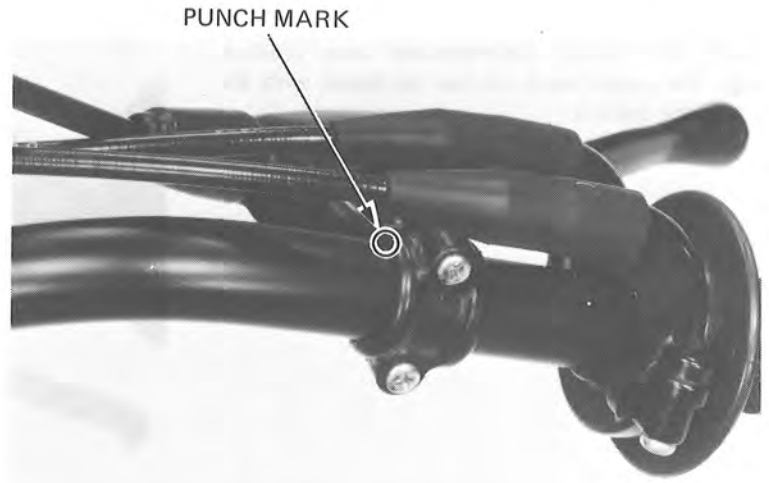

Apply grease to the throttle grip area of the handlebar and install the throttle grip.
Align the punch mark on the handlebar with the split of the throttle grip housing.
Tighten the screws.

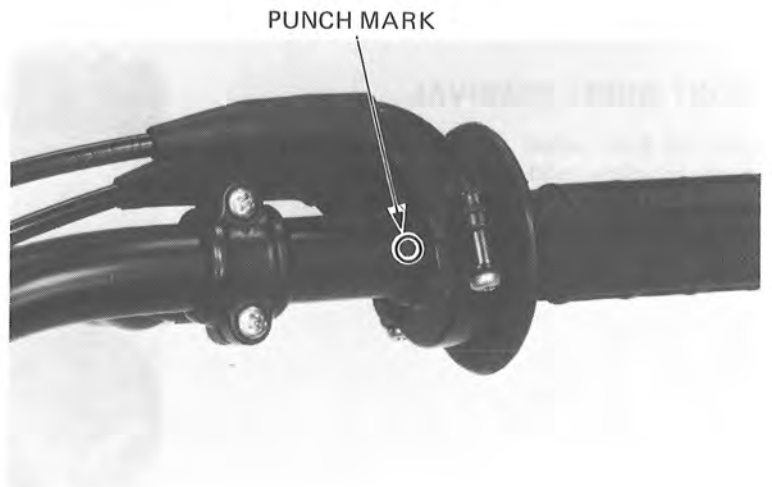

Install the clutch lever bracket.
Align the punch mark on the handlebar with the split in the clutch lever bracket.
Install the engine stop switch.

