

## SHOCK ABSORBER

Raise the rear wheel off the ground by placing a jack or block under the engine.

Remove the seat.


Remove the side covers.

Remove the exhaust pipe and muffler (Page 15-1).


Remove the air cleaner case (Page 4-4).

### NOTE

Seal the carburetor inlet with tape or clean cloth to keep dirt and debris from entering the intake tract.

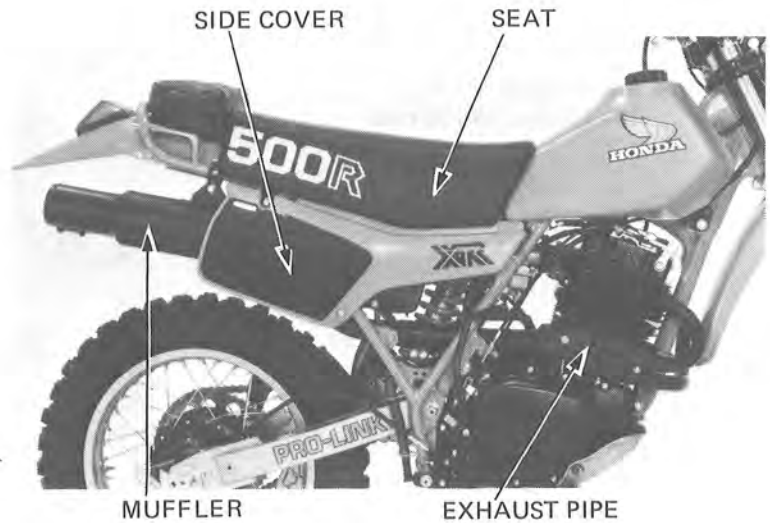

Remove the shock absorber upper mount bolt.

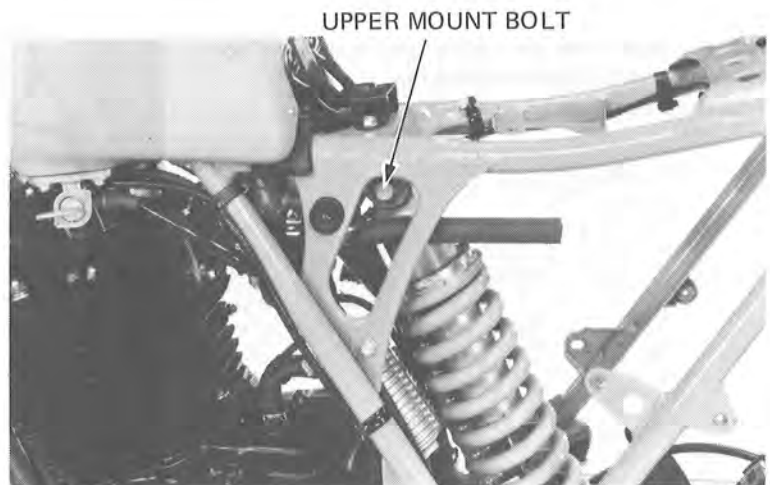

Remove the bolt attaching the shock link to the frame.

### CAUTION:

*Do not remove the bolt connecting the shock arm to the shock link.*

