



Loosen the shock absorber lower bolt,
Move the rear shock absorber back as shown.
Lift up the rear wheel with a jack or block under
the wheel until the lower mount bolt is clear of the
swingarm.

NOTE

Do not let the shock absorber touch the
frame brackets when lifting up the rear wheel.
This may cause damage to the shock absorber
thread.



LOWER MOUNT BOLT

Remove the rear shock absorber lower bolt and
remove the shock absorber.

NOTE

Do not let the rear wheel fall.

LOWER MOUNT BOLT TENSION ARM



DISASSEMBLY


Hold the upper part of the shock in a vise with
soft jaws or a shop towel.
Loosen the lock nut and adjusting nut.

CAUTION:

*Be careful not to damage the hose connection
in a vise.*

NOTE

The pin spanners are optional tools.

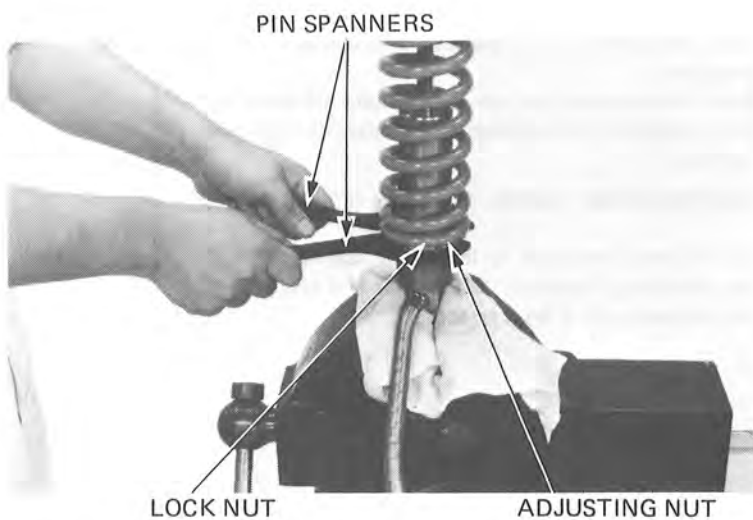

LOCK NUT

ADJUSTING NUT