


7. FRONT FORKS

ASSEMBLY

Clean all parts with non-flammable or high flash point solvent.

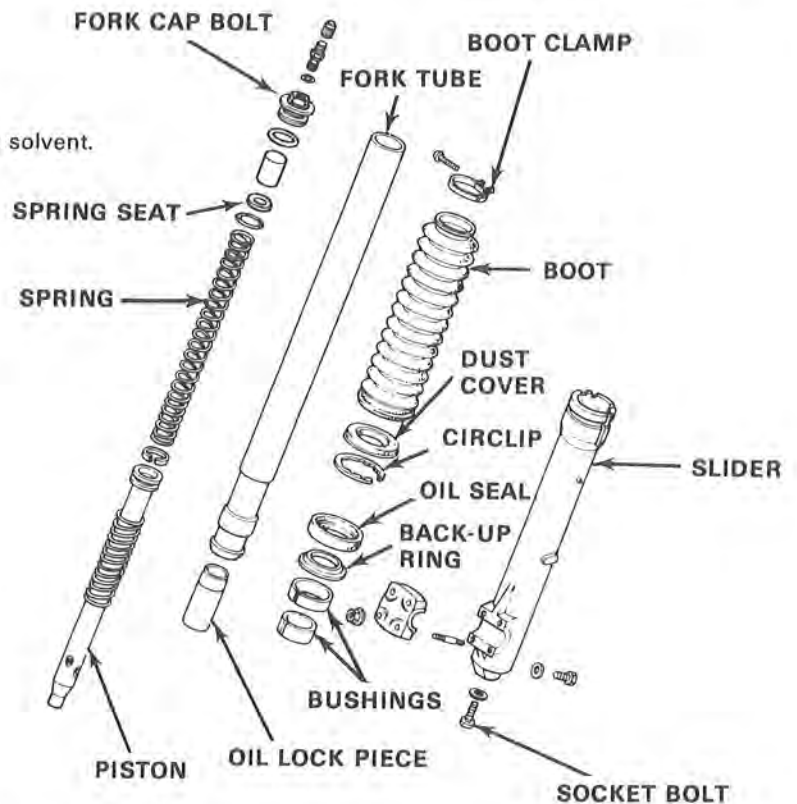

FRONT FORK OIL

Fork oil capacity has been increased for 1982. Pour in the specified amount of ATF.


STANDARD CAPACITY: 395 cc (13.5 oz)

Compress the front fork and measure the oil level from the top of the tube.

STANDARD OIL LEVEL: 156 mm (6 1/8 in)

RECOMMENDED OIL LEVEL: 146-186 mm (5 3/4-7 3/8 in)

To obtain different damping characteristics, change the amount of oil in the forks.

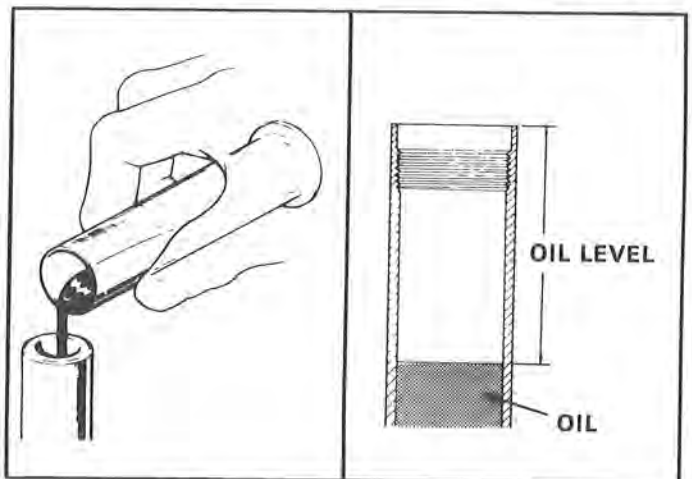

Maximum level	146 mm (5 3/4 in)	Slightly stiffer spring effect when fork is charged with standard air pressure.
Minimum level	186 mm (7 3/8 in)	Slightly softer spring effect when fork is charged with standard air pressure.

STANDARD AIR PRESSURE: 0 kg/cm² (0 kPa, 0 psi)

RECOMMENDED AIR PRESSURE RANGE: 0-1 kg-m (0-98 kPa, 0-14 psi)